

*One Blue Hill Plaza, 16<sup>th</sup> Floor, PO Box 1546  
Pearl River, NY 10965  
1-800-PC-AMERICA, 1-800-722-6374  
(Voice) 845-920-0800 (Fax) 845-920-0880*

## **Logic Controls LS6000 Kitchen Video System (KVS) Hardware Installation**






A kitchen video system and bumpbar can be used by kitchen staff to keep track of orders as they come in and are prepared. This document provides step-by-step instructions for setting up the hardware for a bumpbar.

**For the Bumpbar to work with the LS6000 control unit a special cable (P/N: KB17CABLE-RJRJ) which has a RJ11 connection at each end, is required.**

## Hardware setup

You will need the following items to set up your kitchen video system:

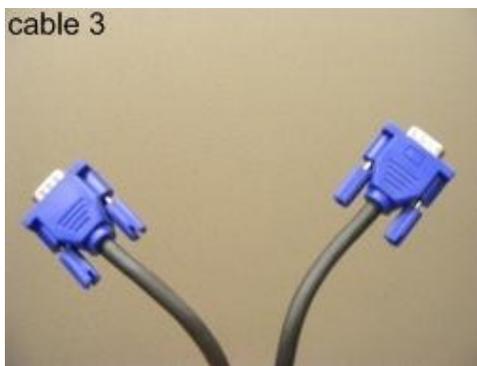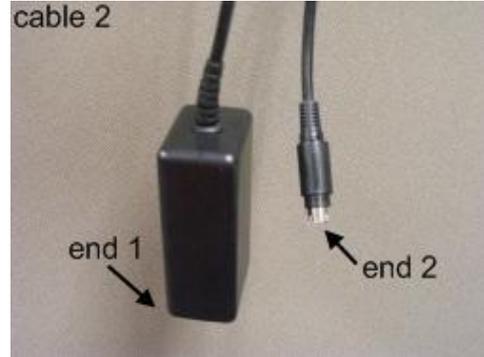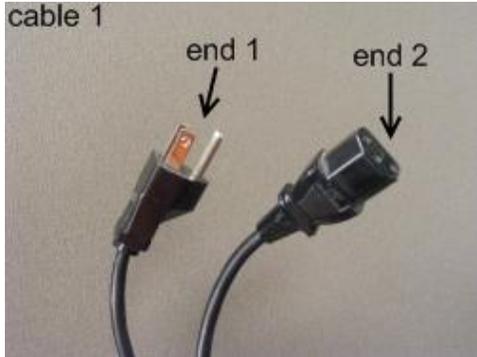


Bumpbar (P/N: KB1700G)

Requires cable (P/N: KB17CABLE-RRJ) to work with LS6000.



Follow these steps to set up the hardware:

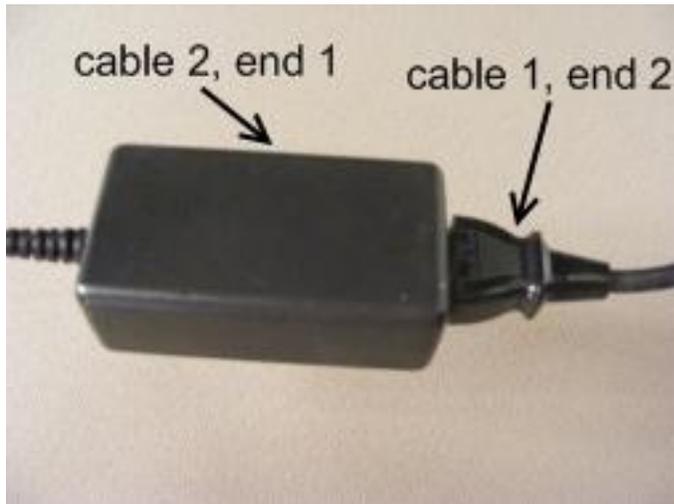


1. Plug **end 2** of **cabl e 1** into **end 1** of **cabl e 2**.
2. Plug **end 1** of **cabl e 1** into a power outlet.



3. Plug one end of **cabl e 3** into the appropriate port on the monitor.



4. Plug **end 2** of **cabl e 2**, the **bump bar**, and the remaining end of **cabl e 3** into the **Logic Net LS6000**.
5. If the network cable is not plugged into the LS6000, plug it in now.

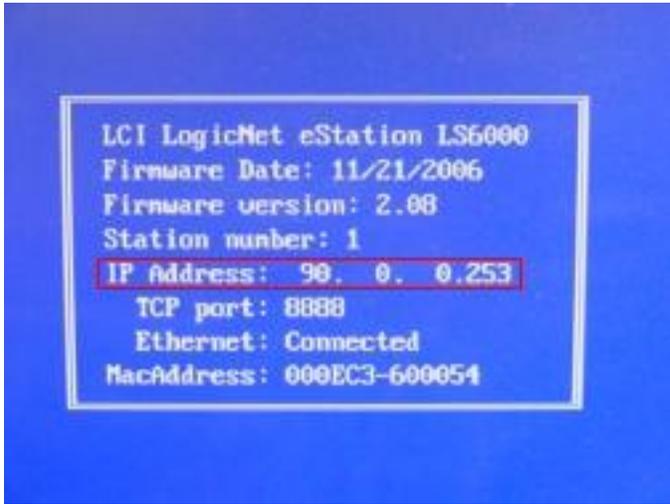

6. Turn on the monitor.
7. After a few seconds, you will see the screen pictured to the left. Write down the IP address of the Bump Bar client as displayed on your monitor.